

DataView[®]

Data analytics software



**An essential platform for creating
your customised measurement reports
for the following areas:**

- Electrical Safety and Inspection
- Power, Energy and Disturbances
- Climate and Environmental Data Loggers

DataView[®]

Software platform for data analytics



DL Transfer

- Thermometers
CA 1821, CA 1822 & CA 1823
- Thermometer and hygrometer CA 1246
- Thermometer-anemometer CA 1227
- Lux meter CA 1110
- pH meter CA 10101
- Conductivity meter CA 10141
- Air quality analyser
CA 1510
- Loggers L411, L412 et L461
- Automatic measurement reports
in Word format (.docx)



DataView[®]

- ✓ Configuration of instruments
- ✓ Connected to a PC or via Bluetooth
- ✓ Recovery of the measurement data
stored in the instrument
- ✓ Backup of measurement files
- ✓ Opening of backup files
- ✓ Processing and creation of reports
- ✓ Export into Excel spreadsheets
- ✓ Export in .pdf format
- ✓ Database management



DTR

- Ratiometer
DTR 8511

MOT

- Micro-ohmmeters
CA 6240,
CA 6255,
CA 6292



Power Analyser Transfer 2

- Energy analysers Qualistar
CA 8331, CA 8333,
CA 8336, CA 8436

- Configuration of alarms
- Configuration of transients
- Configuration of trends
- Real-time display



PEL Transfer

- Power and energy loggers
PEL112, PEL113, PEL115, PEL51 & PEL52

- Multi-instrument network
management
- Real-time display
- Ethernet & Wifi communication



Power Analyser Transfer 3

- Energy analysers
Qualistar CA 8345, CA 8343

- Monitoring EN50160
- Inrush
- Shock waves



GTC

CA 6417 Earth Clamp

- Instant measurements



GTT

CA 6470N, CA 6471, CA 6472
earth and resistivity testers

- Remote tests
- Instantaneous acquisition



The measurements taken can also be processed using the multi-product expert software

DataView® automatically recognises the device when it is connected to the PC and opens the relevant menu. This menu, presented in a tree structure, gives the user direct access to the data stored in the device, its configuration, and more...

DataView® features multiple predefined report templates for quick report generation in full compliance with current standards. Users can create their own templates according to their needs.

ICT

CA 6116N and CA 6117
electrical installation testers

- Customization of measurement campaigns with transfer into the instrument
- Preparation of installation verification reports



Power Analyser Transfer

Qualistar CA 8332B, CA 8334B

- Configuration of alarms
- Configuration of transients
- Configuration of trends
- Real-time display

Power and harmonics clamps
F407 and F607

- Real-time display
- Bluetooth

CA 8220 and CA 8230 power analysers

- Configuration of trends
- Real-time display



MEG


CA 6543, CA 6547, CA 6549, CA 6550,
CA 6555, CA 6526, CA 6532 & CA 6534
megohmmeters

- Activation of remote tests
- Real-time display
- DAR, PI, DD Rapport
- Graphical plotting of the tests



DataView®

Software platform for data analytics

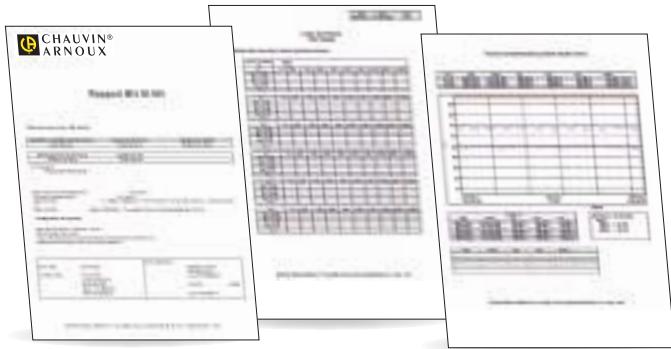

EN 50160 reports for the **QUALISTAR+** models

The EN 50160 standard concerns voltage quality. With increasingly sensitive receivers and a network affected by disturbances due in particular to non-linear loads, it is crucial to check the quality of the voltage supplied.

After proposing automatic configuration of your instrument and the measurement campaign to be run, the software offers comprehensive evaluation functions and drafts automatic reports in compliance with EN50160. The summary page summarizes the results of the campaign. It also includes the location, the conditions, the equipment used and information about the operator.



DataView® is specified for

Windows** 10 and Windows 11


*You must have Administrator rights on the PC to install DataView®.

**Windows® is a registered trade mark of Microsoft® Corporation

ICT reports in compliance with the applicable standards for installation testers

ICT proposes to define the tree structure which will be used during the actual test campaign (Sites, Parts, Objects) and the tests to be performed for each of the items. Once the campaign has been defined, it can then be recorded in the instrument via the communication link.

This saves significant time in the field. For report generation, in addition to the references of the customer site and the operator, it is possible to predefine the format of the report to be generated by DataView® by choosing in a list of existing templates which comply with the applicable standards: IEC 60364. The report can also be customized.

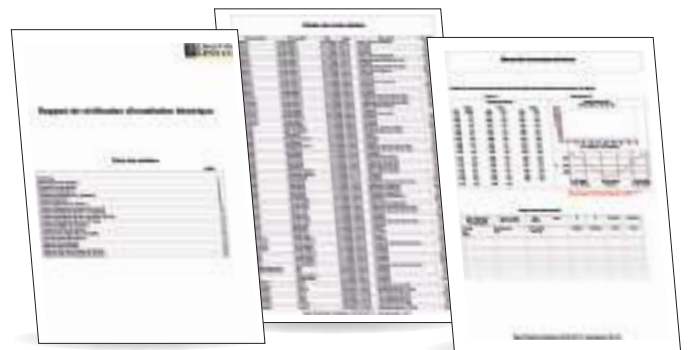

Connect your instrument to your PC very simply via:

- the RS 232 interface
- the USB link
- Bluetooth
- WiFi
- Ethernet

INTERNATIONAL
Chauvin Arnoux
12-16, rue Sarah Bernhardt
92600 Asnières-sur-Seine
Tél : +33 1 44 85 44 38
export@chauvin-arnoux.fr
www.chauvin-arnoux.com

UNITED KINGDOM
Chauvin Arnoux LTD
Unit 1 Nelson Ct, Flagship Sq, Shaw
Cross Business Pk
Dewsbury, West Yorkshire - WF12 7TH
Tel: +44 1924 460 494
info@chauvin-arnoux.co.uk
www.chauvin-arnoux.com

MIDDLE EAST
Chauvin Arnoux Middle East
PO Box 60-154
1241 2020 Beirut
Tél. : +961 1 890 425
camie@chauvin-arnoux.com
www.chauvin-arnoux.com

